

medw|ork®



gSlider

AXS_tome

AXS_tome




Synergy from expertise and technology

We have addressed the complex requirements of biliary system access and incorporated them in a unique 3D shaped instrument. With **AXS_tome** papillotomes you can completely rely on your sense of touch. Precision, tactile control and perfect guidance of instruments are essential for accessing the bile duct.

Tactile feedback from the direct guide wire transition makes it easier for you to maneuver. Feel the difference and thus create safer access.



Micro-tip design

Owing to a smooth guide wire transition to the micro-tip, tissue irritation is minimized and the risk of complications reduced.

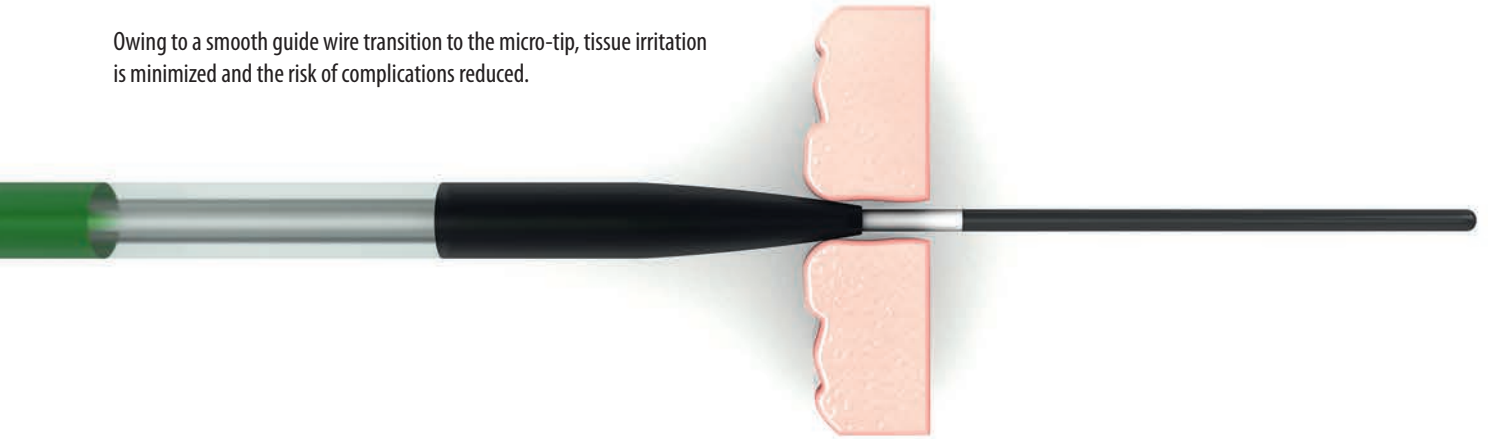

Anatomical 3D orientation

Based on consistent 11 o'clock orientation, the AXS_tome papillotomes also follow the left frontal anatomy of the distal common bile duct.

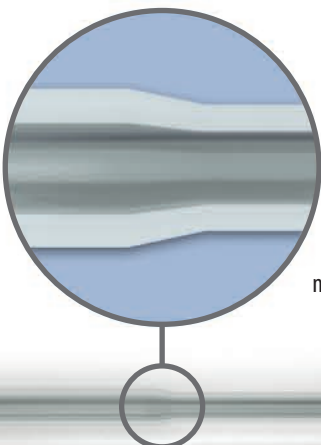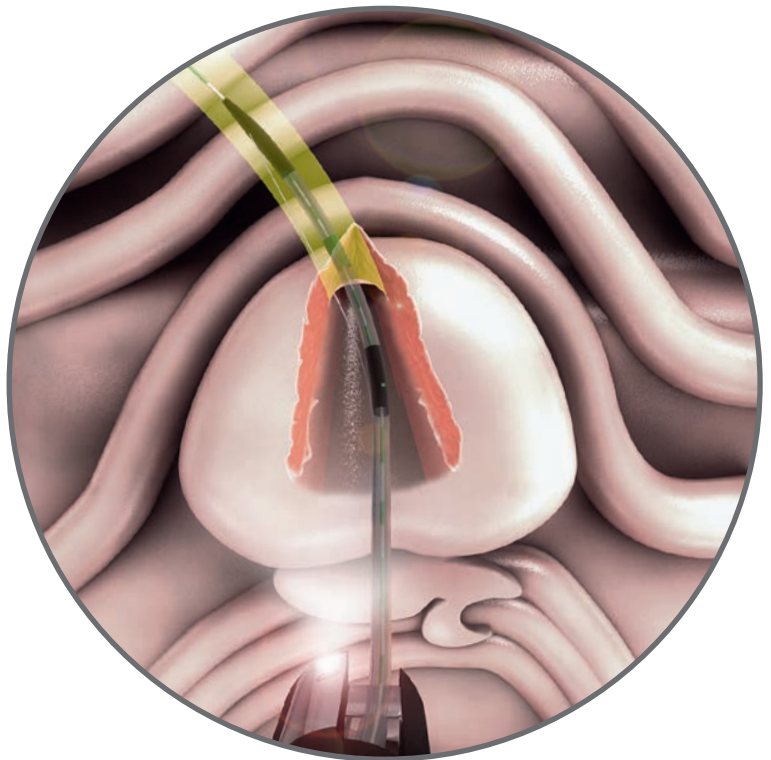

Multi stage catheter



The proven multi-stage design ensures maximum control and stability during intubation.



AXS_tome

AXS_tome Papillotomes __ 3 Lumen


Anatomical 3D orientation, multi-stage-catheter, handle with OL power connection



Product Code	Order No.	Characteristics	Cutting Length	Accepted Guide Wire	ø Working Channel	Unit
PAP1-C7-20-35-OL	501048	Micro-tip, 3 lumen, CMT	20 mm	.035"	2,8 mm	5
PAP1-C7-25-35-OL	502290	Micro-tip, 3 lumen, CMT	25 mm	.035"	2,8 mm	5
PAP1-C7-30-35-OL	501050	Micro-tip, 3 lumen, CMT	30 mm	.035"	2,8 mm	5
PAP1-C8-20-35-OL	501051	Micro-tip, 3 lumen, monofil	20 mm	.035"	2,8 mm	5
PAP1-C8-25-35-OL	502291	Micro-tip, 3 lumen, monofil	25 mm	.035"	2,8 mm	5
PAP1-C8-30-35-OL	501052	Micro-tip, 3 lumen, monofil	30 mm	.035"	2,8 mm	5
PAP1-F8-30-35-OL	501993	Micro-tip, 3 Lumen, monofil, insulated cutting wire (ProCut)	15 15 mm proximal insulated	.035"	2,8 mm	5

AXS_tome Papillotomes __ 2 Lumen


Anatomical 3D orientation, multi-stage-catheter, handle with OL power connection




Product Code	Order No.	Characteristics	Cutting Length	Accepted Guide Wire	ø Working Channel	Unit
PAP1-C2-20-35-OL	501034	Micro-tip, 2 lumen, CMT	20 mm	.035"	2,8 mm	5
PAP1-C2-25-35-OL	501036	Micro-tip, 2 lumen, CMT	25 mm	.035"	2,8 mm	5
PAP1-C2-30-35-OL	501039	Micro-tip, 2 lumen, CMT	30 mm	.035"	2,8 mm	5
PAP1-C5-20-35-OL	501046	Micro-tip, 2 lumen, monofil	20 mm	.035"	2,8 mm	5
PAP1-C5-30-35-OL	501047	Micro-tip, 2 lumen, monofil	30 mm	.035"	2,8 mm	5
PAP1-D2-30-21-OL	501853	Micro-tip, 2 lumen, CMT , Balloon Enteroscopy	30 mm	.021"	2,8 mm	2

AXS_tome Papillotomes __ easycure®

Anatomical 3D orientation, multi-stage-catheter, handle with OL power connection

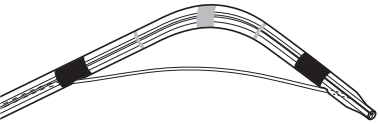


Product Code	Order No.	Characteristics	Cutting Length	Accepted Guide Wire	ø Working Channel	Unit
PAP1-C7-20-E35-OL	501930	Micro-tip, 3 lumen, CMT , easycure®	20 mm	.035" ≥ 200 cm	3,2 mm	5
PAP1-C7-30-E35-OL	501929	Micro-tip, 3 lumen, CMT , easycure®	30 mm	.035" ≥ 200 cm	3,2 mm	5
PAP1-C8-20-E35-OL	501931	Micro-tip, 3 lumen, monofil, easycure®	20 mm	.035" ≥ 200 cm	3,2 mm	5
PAP1-C8-25-E35-OL	502292	Micro-tip, 3 lumen, monofil, easycure®	25 mm	.035" ≥ 200 cm	3,2 mm	5
PAP1-C8-30-E35-OL	501919	Micro-tip, 3 lumen, monofil, easycure®	30 mm	.035" ≥ 200 cm	3,2 mm	5
PAP1-F8-30-E35-OL	502017	Micro-tip, 3 lumen, monofil, insulated cutting wire (ProCut), easycure®	15 15 mm proximal insulated	.035" ≥ 200 cm	3,2 mm	5
PAP1-K8-06-E35-OL	501920	Needle, 3 lumen, easycure®	6 mm	.035" ≥ 200 cm	3,2 mm	5

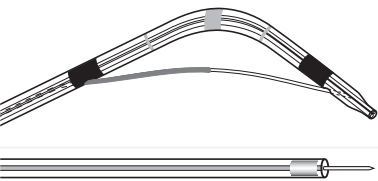


AXS_tome Papillotomes __ 3 Lumen, preloaded with gSlider

Anatomical 3D orientation, multi-stage-catheter, handle with OL power connection

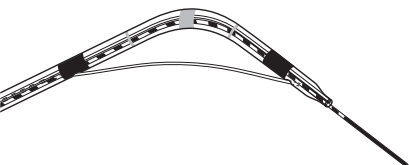

Product Code	Order No.	Characteristics	Cutting Length	gSlider	ø Working Channel	Unit
PAP1-X7-25-35-450-OL	502310	Micro-tip, 3 lumen, CMT , preloaded gSlider	25 mm	0.35" 450 cm	3,2 mm	5
PAP1-X8-30-35-260-OL	502286	Micro-tip, 3 lumen, monofil, preloaded gSlider, easycure®	30 mm	0.35" 260 cm	3,2 mm	5
PAP1-X8-30-35-450-OL	502287	Micro-tip, 3 lumen, monofil, preloaded gSlider	30 mm	0.35" 450 cm	2,8 mm	5

gSlider

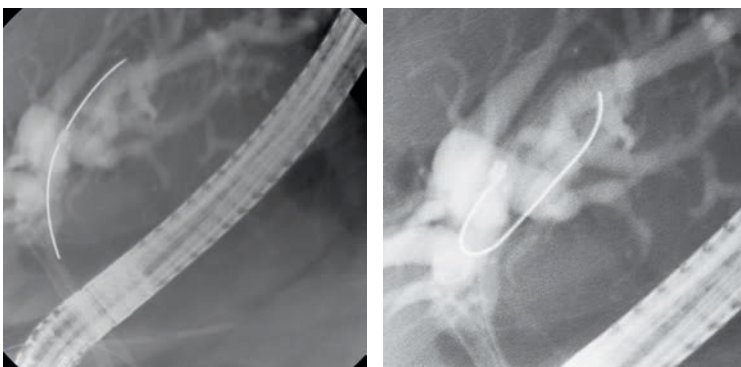

X-ray view

_ unique, precise radiological visualisation



Hydrophilic coated tip

- _ extremely flexible, atraumatic tip for easy and gentle cannulation
- _ 10% greater sliding characteristics in comparsion with leading competitors



Nitinol core

- _ outstanding control due to optimised axial force transmission
- _ extremely kink resistant



Insulation

- _ continous insulation allows the safe use of HF current when the guide wire is in place

Guide wires _ gSlider



	Product Code	Order No.	Characteristics	Diameter	Length	Unit
	gSlider WIR1-F9-35-260	502145	Straight, Nitinol, insulated, green/white, radiopaque hydrophilic tip	.035"	260 cm	2
	gSlider WIR1-F9-35-450	502144	Straight, Nitinol, insulated, green/white, radiopaque hydrophilic tip	.035"	450 cm	2
	gSlider WIR1-J9-35-260	502183	J-Tip, Nitinol, insulated, green/white, radiopaque hydrophilic tip	.035"	260 cm	2
	gSlider WIR1-J9-35-450	502184	J-Tip, Nitinol, insulated, green/white, radiopaque hydrophilic tip	.035"	450 cm	2
	MIS1-TORQUES	500950	Torque for guide wires	-	-	5



PureWhite



german  made